



Applications



Wire Fencing

Design and Performance

Load Rating

- 400 kg / 880 lbs


Material

- Gripple housing: Zinc (ZA2)
- Spring: Stainless Steel
- End cap: UV Stabilized PP
- Ceramic wedge: Ceramic (Sintox)

Compatibility

- Wire type: High tensile barbed wire
- Wire range: 2 x 1.57 mm - 2.00 mm
- Standard wire gauge: 2 x 15.5 swg - 2 x 14 swg

Dimensions and Weights

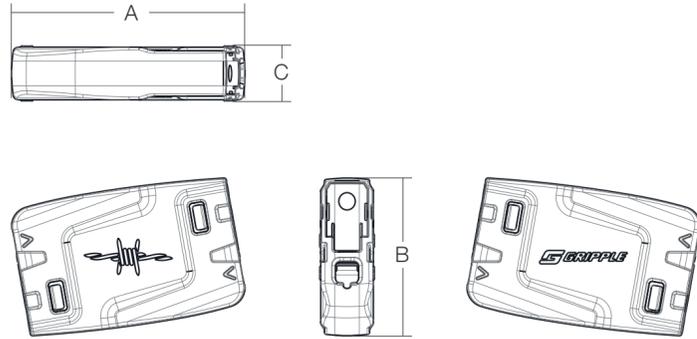

A Length	45 mm / 1.8 in
B Height	32 mm / 1.3 in
C Depth	11 mm / 0.4 in

Packaging

Item weight	45 g / 0.1 lbs
Bag quantity	20
Package weight (bag)	0.9 kg / 2.0 lbs
Box quantity (no. bags)	7
Package weight (box)	6.44 kg / 14.2 lbs

Installation



1 Cut wire at the barb, leaving at least 8 cm / 3 in of wire to make the join.



2 Insert the first barbed wire into the wire joiner ensuring it is tight against the barb.



3 Insert the second wire repeating step 2.